


Note: Some products information on catalogue may be changed because of improving products, but must be same as instruction which is attached with products. Please forgive that we will not make additional advice in advance. Because of printing question, maybe there is little difference compared with the real color of products, sincerely sorry for the inconvenience.

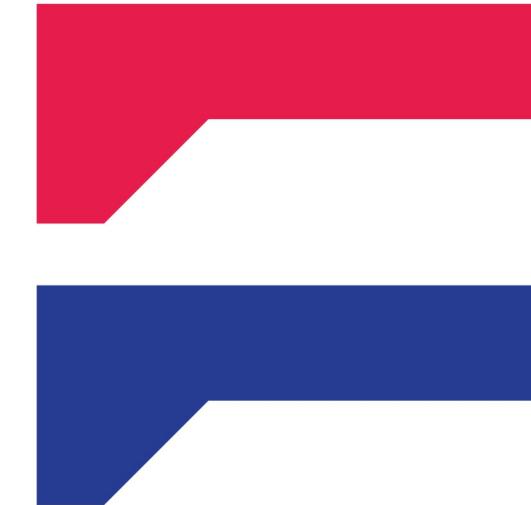

SHUNFA

ZHEJIANG NEW SHUNFA SEWING MACHINE TECHNOLOGY CO.,LTD

Add:2287-1 Jingzhong Road, Hongjia Street, Jiaojiang District,
Taizhou city, Zhejiang Province
E-mail:shunfa@shunfasew.com chinashunfa@126.com
Tel:86-576-88155221 88159900
[Http://www.shunfasew.com](http://www.shunfasew.com)



Shunfa Web



Shunfa Industrial
Sewing Machine



Shunfa Sewing
Machine



Shunfa Official

TO BUILD A CENTURY-OLD BRAND AND THE MOST
RELIABLE SEWING BRAND IN THE WORLD



Smart Sewing
Technology
Creates The Future

CONTENTS

目录

01

Company Introduction

Brand story	01
Company culture	02
Company profile	03/04
Development path	05/06
Product poster	07/08

02

Lockstitch Sewing Machine

A6	10
A9	10
A7	11
A8	11
S610	12
S610HB	12
S620	13
S619	13
S510-D4	14
S310	15
S320	15
SF 8700	16
SF 6-28	16
SF 8701D	16
SFT 388D	16
SF 777M-D4	17
SF 777D	17
SF 777T-A	18
A0303-T2	19
SF 0303D/SF 0303-D3/SF 0303CX	19
SF 202-D3	20
SF 202D/SF 202	20
SF 20U-53D	21
SF 1530/SF 20U-33/SF 20U-53	21
A3900-3N-8D	22
SF 8452Z-D3	23
SF 8450D/SF 8750D	23
SF 845D/SF 875D	23

03

Overlock Sewing Machine

F7-4D/EP/B/Q	25
F7-4D/EP/B/BK	25
F6-4D/EP	26
F6-4D/CX	26
F6-4D	26
F3-4D/EP	27
F3-4D	27
SF 958-4D/EP / SF 958-4D	27
SF 747E / SF 747F-514M2-24/TY	27
F7T-4D/EP/B	28
SF 799EXT-4D	28
SF 798EXT-4D/EP	28

04

Interlock Sewing Machine

H7-01CB/UT/WP	30
H7-01CB/D	30
H8-01CB/UT/WP	31
H8-01CB/D	31
H7-05CB/D/B	32
SF 582-05CB/D	32
SF 582-01CB/UT/WP	33
SF 662-01CB/UT/WP	33
SF 582-01CB/D	33
SF 662-01CB/D	33
SF 600D-33/PUT/RPG	34
SF 664-35BB/UT	34
SF 562-08C/UT	34
SF 1500-156-UF	35
SF 1560-160L	35
SF 008-12064P	36
SF 4412D/UT	36
SF 6200-D(-7)	37

05

Special Machine

SF 9813	39
SF 808/SF 818	40
SF 0308E/SF 2808/SF 2808S	40
SF 430D/SF 1900	41
SF 438D/1903	41
SF 9820	42
SF 781EF	43
SF 1790	43
SF 373D/SF 1377D	44
SF 373D-988A	44
SF 927/928	45
SF 2284/SF 2284D-7	46
SF 1310/2210/3020	47
SF 1390	48
SF 1204HC/SF 1202HC/SF 1201	49
SF 168/SF 63922	50
SF 1254A/SF 2500/SF 2971	50
SF 335/SF 810/SF 4420/SF 181/SF 801	51
SF 8365/SF 8703/SF 243/SF 9910/SF 341	52
SF 2628LG/SF 246/SF 441/SF 8B/SF 1341-C	53
SF 500H/SF B38/SF 1977A/SF 700/SF 811	54
SF DT/SF QST	55
SF 75L/SF 600H/SF 300L	55
SF 1C/SF 100L	55
SF 26-1A/GK9-310/SF-3/SF-125	56
SF 801A/802A/SF 600/SF 500	56

BRAND STORY

since
1997

The original intention of the establishment of Shunfa brand is based on the idea that "traditional sewing machines not only reflect true feelings of life, the love and warmth of the world, but also sew a better life."

Mr. Huang Zhengfa, the founder of Shunfa, developed the brand with his pursuit of excellence spirit and down-to-earth style. In 1997, Chinese garment industry was slowly completing the initial stage of accumulation. Processing and manufacturing are the core link of the garment industry. With the simple desire to "assemble a cost-effective sewing machine and create a reliable brand, Shunfa brand came into being.

A slight change in garment industry can cause huge waves in the sewing equipment industry. When the market falls into a decline, a large number of sewing equipment companies will fall into a predicament of survival. Since the reform and opening up, the sewing

equipment industry, which has been summed up as "three-time boom and three-time recession", face a lot of challenges. Shunfa had already well prepared for strategic cooperation with industry benchmark companies to break into the market. With its huge technical advantages and stable quality, Shunfa overcame commercial barriers, successfully established a foothold in the market and entered a stage of rapid development.

Full of ingenuity and perseverance, Shunfa issues new challenges to himself again and again, forcing himself to undergo new transformations. Mechatronics has passed, and the era of intelligence is coming. The characteristics of "smart sewing" is integrating technology and wisdom into the brand genes. Shunfa upgraded and developed a variety of products such as "lockstitch, overlock, interlock, intelligent cutting machine, automatic button attach

machine" and other products. China's first full-touch intelligent sewing machine was born in Shunfa, and the intelligent step motor drive lockstitch machine already lead the industry trend. In the Chinese sewing machinery industry, we advocate the conversion of production way and embarking on a new journey of high-quality development. Shunfa has relocated and expanded its production capacity three times, showing the great resilience of the brand. In the endless river of sewing machine, Shunfa is what a brave person should look like. It not only walks in the forefront of the Chinese sewing machine industry, but also has a place in the global sewing machine brand.



COMPANY CULTURE

Enterprise mission

Intelligent sewing, sewing a better life

Enterprise positioning

SHUNFA quality, world sharing

Enterprise vision

To build a century old brand and the most reliable sewing brand in the world



Core values

Create value for customers, create opportunities for employees, and create platforms for suppliers

Entrepreneurial spirit

Professional and pragmatic, pioneering and innovative

Enterprise goal

To become a trusted partner of Shunfa's global users and upstream and downstream markets, and to create a community of common future

SHUNFA QUALITY, SHARED BY THE WORLD

SINCE 1997

Established 2 decades ago 1997, ZHEJIANG SHUNFA SEWING MACHINE CO., LTD is a private enterprise which including sewing machine development, produce and selling. It is one of the most important sewing equipment manufacturer and R&D in China.

500,000+

Annual output is more than 500,000 units, sold to more than 80 countries and regions.

HONOR

With its high-quality products, Shunfa has won the honorary titles such as "Top 10 enterprises of sewing machinery in China light industries", "Top 30 enterprise in China light industry equipment manufacturing", "Top 100 enterprise in China light industry", "Top ten enterprises in China's light industry for seven consecutive years from 2016 to 2021", "China Well-known Trademark in 2018", "Zhejiang Famous Trademark in 2016", "Taizhou Famous Trademark in 2004", "Government Quality Award", "Vice President Unit of China Sewing Association", "National High-Tech Enterprise", "SO9001:2000 certificate", "CE certificate".

DEVELOPMENT

We will further increase investment in infrastructure, technological transformation, brand innovation, quality assurance, talent introduction, corporate culture construction, informatization construction, etc. With the goal of internationalization and modernization of management, Shunfa make efforts to become R&D and manufacturing base in Chinese sewing machine industry.



Casting center



CNC center



Streamline




Packing



Painting Center

DEVELOPMENT PATH

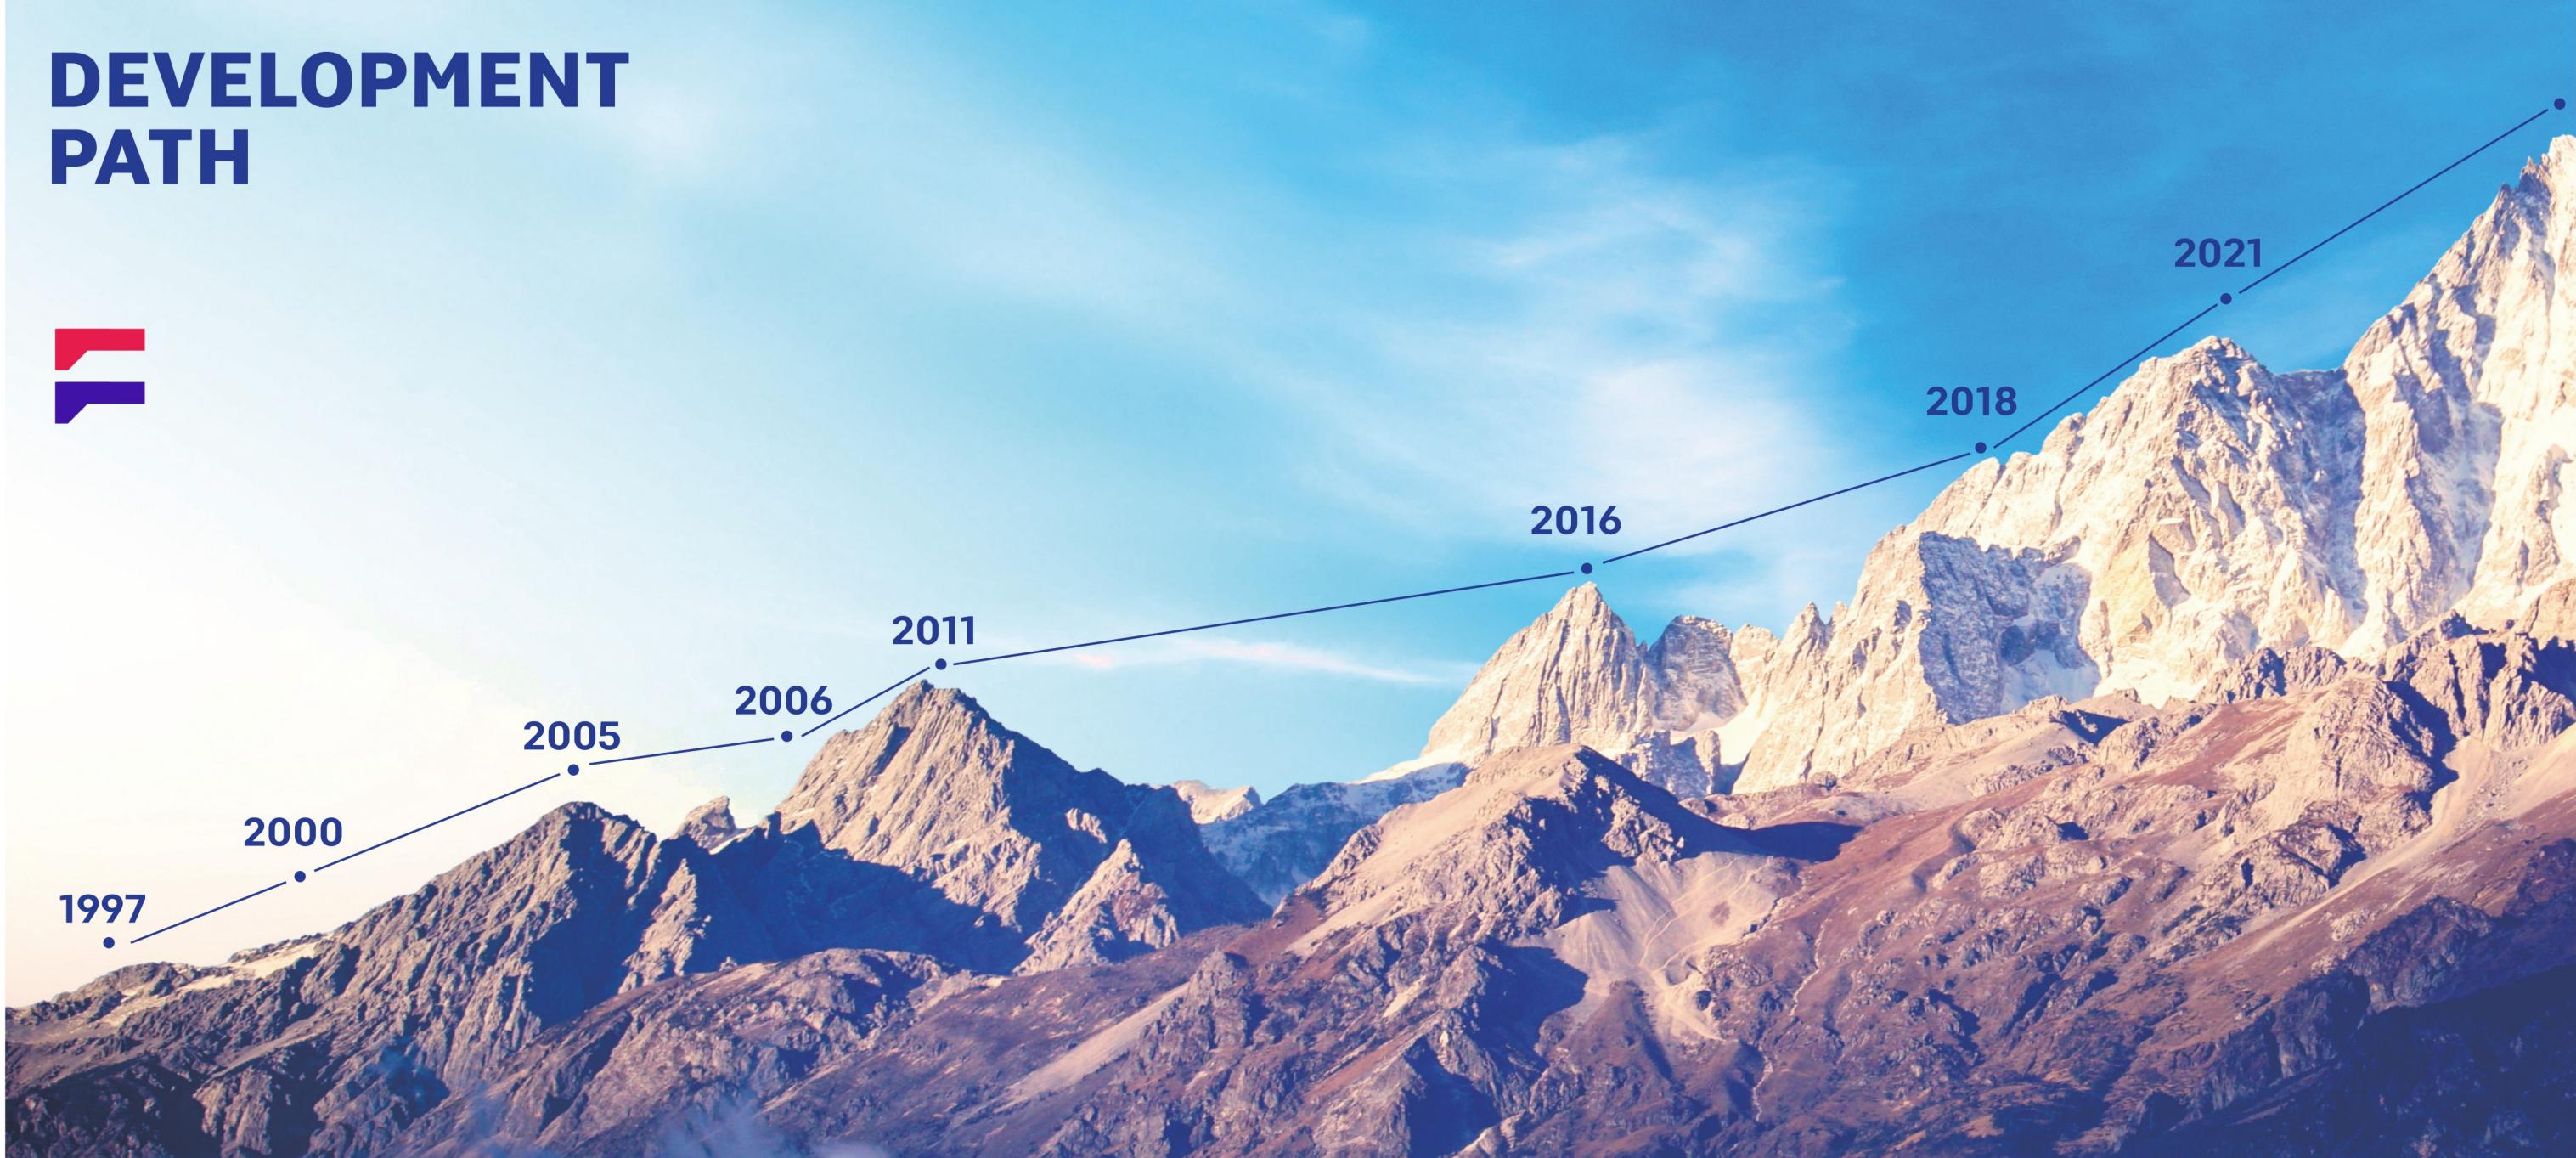

1997	2000	2005	2006	2011	2016	2018	2021	2023 + ∞
ORIGIN	GROWING	DEVELOPMENT	COOPERATION	UPGRADE	LEAD	INTELLIGENT	QUALITY	FUTURE
SHUNFA company is founded, and the first SF26-1 bag closer is launched into the global market.	SHUNFA adjusts product structure, and focuses on the production of lockstitch, overlock, and interlock sewing machine series.	SHUNFA expands its production capacity and moves to the new plants on 18th October.	Cooperating with industry leader to achieve technical strategic cooperation.	Through transformation and upgrading, SHUNFA reaches great achievement in new technology and automation.	The first sewing machine with screen touch technology is launched, and becomes the industry trend.	SHUNFA opens the era of manufacturing automatic equipment including before-sewing and after-sewing series.	The new factory which integrates casting, finishing, spraying, and assembly with a production supporting process is put into use, and steadily promote the lean production management system.	Adhere to original intention, uphold ingenuity, and create infinite possibilities
ORIGIN	GROWING	DEVELOPMENT	COOPERATION	UPGRADE	LEAD	INTELLIGENT	QUALITY	FUTURE



SHUNFA QUALITY, SHARED BY THE WORLD

To Build A Century-old Brand And The Most Reliable Sewing Brand In The World

LOCKSTITCH SERIES



A6

Upgraded single-step-motor-drive lockstitch sewing machine
(suitable for different type of fabric)



Insert type screen



Stepper motor control, mute reverse
sewing, good coincidence,beautiful
stitch



Single move knife

A9


Upgraded single-step-motor-drive lockstitch
sewing machine (suitable for different type
of fabric, large operation space)



Big space(300mm)(A9)



LED Logo

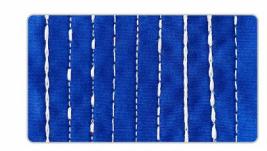

Come with 9 kinds of patterns
and it can make customization

A6	DBX1 11-18#	0-5	*	*	*	*	*	*	*	*	5.5-13	5000	680x245x523	40/48	
A9	DBX1 11-18#	0-5	*	*	*	*	*	*	*	*	5.5-13	5000	680x245x523	40/48	
A6H	DBX1 14-22#	0-7	*	*	*	*	*	*	*	*	5.5-13	5000	680x245x523	40/48	
A9H	DBX1 14-22#	0-7	*	*	*	*	*	*	*	*	5.5-13	5000	680x245x523	40/48	



A7

Upgraded double-step-motor-drive lockstitch sewing machine
(suitable for different type of fabric)



A8

Upgraded double-step-motor-drive lockstitch
sewing machine (suitable for different type of fabric,
double moving knife, sealed oil tank)



Insert type screen



Come with 9 kinds of patterns
and it can make customization



Small bird nest(3mm thread tail)



Insert electronical thread
loose device



Stepper motor control,
mute reverse sewing,
good coincidence,beautiful
stitch



Double moving knife trimmer
system(A8)



S610

Intelligent lockstitch machine (single step motor)



S610HB

Intelligent lockstitch machine (step motor)
(mechanical thread loose)



Electronic stitch length,
accurate to 0.1mm and can
be locked according to the
demand.



Stepper motor control,
mute reverse sewing,
good coincidence, beautiful
stitch.



Come with 9 kinds of patterns
and it can make customization



Insert electronical thread
loose device



High quality back reverse
stitch



Condensed sewing, make
short thread tail and
prevent thread off

A7	DBX1 11-18#	0-5	*	*	*	*	*	*	*	5.5-15	4500	680x245x523	40/48			
A7H	DBX5 14-22#	0-7	*	*	*	*	*	*	*	5.5-15	4000	680x245x523	40/48			
A8	DBX1 11-18#	0-5	*	*	*	*	*	*	*	5.5-15	4500	680x245x523	40/48			

S609	DBX1 11-18#	0-7	*	*	*	*	*	*	*	5.5-13	5000	680x245x523	40/48			
S610	DBX1 11-18#	0-7	*	*	*	*	*	*	*	5.5-13	5000	680x245x523	40/48			
S610HB	DBX1 14-22#	0-7	*	*	*	*	*	*	*	5.5-13	5000	680x245x523	40/48			



S620

Intelligent lockstitch machine (double step motor, double knife trimmer)



S510-D4

High speed computerized lockstitch machine



S619

Intelligent lockstitch sewing machine
(double step motor, single knife trimmer)



One step motor control trimming and presser foot lifting



Stepper motor control, mute reverse sewing, good coincidence,beautiful stitch



Double moving knife trimmer system(S620)



Come with 9 kinds of patterns and it can make customization



Small bird nest(3mm thread tail)



Single moving knife trimmer system(S619)



One-key reset, voice guidance



Suit for thin and heavy fabric



Built-in automatic presser foot lifter



Japanese hook (optional)



Single coaxial driving



Usb interface

S620	DBX1 11-18#	0-7	*	*	*	*	*	*	*	5.5-15	5000	680x245x523	40/48			
S620H	DBX5 14-22#	0-7	*	*	*	*	*	*	*	5.5-15	5000	680x245x523	40/48			
S619	DBX1 11-18#	0-7	*	*	*	*	*	*	*	5.5-15	5000	680x245x523	40/48			

S510-D3	DBX1 11#-18#	0-5	*	*	*	*	*	*	*	5.5-15	5000	680x245x523	37/44			
S510-D4	DBX1 11#-18#	0-5	*	*	*	*	*	*	*	5.5-15	5000	680x245x523	37/44			
S510H	DBX1 14#-22#	0-5	*	*	*	*	*	*	*	5.5-15	5000	680x245x523	37/44			
S510-7	DBX1 11#-18#	0-7	-	*	*	*	*	*	*	5.5-15	5000	680x245x523	37/44			



S310

Intelligent lockstitch sewing machine (direct drive)



S320

Intelligent lockstitch sewing machine
(trimmer only)



Power saving 71%



Suit for thin and heavy fabric



Needle position



Led light(brightness adjustable)



SF 8700

Lockstitch sewing machine



SF 6-28

Lockstitch sewing machine



SF 8701D

Direct drive lockstitch sewing machine



SFT388D

Direct drive imitation hand-stitch machine

S310	DBX1 11-18#	0-5	*	*	-	-	*	*	*	5.5-15	5000	680x245x523	40/50		
S310H	DBX1 14-22#	0-5	*	*	-	-	*	*	*	5.5-15	5000	680x245x523	40/50		
S310-7	DBX1 11-18#	0-5	*	*	-	*	*	*	*	5.5-15	5000	680x245x523	40/50		
S320	DBX1 11-18#	0-5	*	*	*	*	*	*	*	5.5-15	5000	680x245x523	40/50		
S320H	DBX1 14-22#	0-5	*	*	*	*	*	*	*	5.5-15	5000	680x245x523	40/50		
S320-7	DBX1 11-18#	0-5	*	*	*	*	*	*	*	5.5-15	5000	680x245x523	40/50		

SF 8700	DBX1 11#-18#	0-7	5	*	-	-	*	-	*	4-9	5000	580x245x523	27-33		
SF 6-28	DBX1 11#-18#	5	-	-	-	*	*	-	-	5.5-13	5000	585x260x540	27.5/34		
SF 8701D	DBX1 11#-18#	0-7	5	*	-	-	*	-	*	4-9	5000	580x245x523	27-33		
SFT388D	DPX5 11-14#	2-5	-	*	*	5.5-13	1400	580x250x530	27/33						



SF 777M-D4

High-speed direct drive auto trimmer built-in foot lifter lockstitch machine with edge cutter



SF 777D

High-speed direct drive lockstitch machine with edge cutter



Knife holder separate, easy control



Electronic thread tension, new led with cold light



With side cutter device



SF 777M-D4 stitch



SF 777T-A

High-speed direct drive lockstitch with edge cutter and hemming device



Knife holder separate, easy control.



Front stitch



Hemming device



Back stitch

SF 777M-D4	DBX1 11-18#	5	*	*	*	5-8.5	4500	590×260×545	30/37.5		
SF 777D	DBX1 11-18#	5	-	*	-	5-8.5	4500	590×260×545	30/37.5		

SF 777T-A	DBX1 11-18#	5	-	*	*	5-8.5	4500	590×260×545	30/37.5		



A0303-T2

Computerized heavy duty top and bottom feeding lockstitch sewing machine with auto trimmer and auto foot lift(step motor type)



SF 202-D3

Computerized heavy duty big hook lockstitch sewing machine with auto-trimmer


SF 0303D

Direct drive top and bottom feeding lockstitch sewing machine for heavy-duty



Electronic thread tension, fill needle, led light, inching backstitch three-in-one



Up and down synchronous feeding, makes sewing smoothly


SF 0303-D3

Computerized top and bottom feeding lockstitch sewing machine for heavy-duty (solenoid type)


SF 0303CX

Top and bottom feeding lockstitch sewing machine for heavy-duty



Big hook component



Stitch


SF 202D

Direct drive heavy duty big hook lockstitch sewing machine



Big hook component



Mechatronics design, intelligent direct drive system, power saving more than 70%


SF 202

Heavy duty big hook lockstitch sewing machine



Electronic thread tension, Inching backstitch three-in-one



Stitch

	(H)							
A0303-T2	*	DPX17 14#-25#	8	*	6-13	2500	680×255×535	40/42
SF 0303-D3	*	DPX17 14#-25#	8	*	6-13	2500	680×255×535	40/42
SF 0303D	*	DPX17 14#-25#	8	*	6-13	2500	680×255×535	40/42
SF 0303	*	DPX17 14#-25#	8	*	6-13	2500	580×255×535	27/35.5
SF 0303CX	*	DPX17 14#-25#	12	*	6-13	2500	580×255×535	27/35.5

	(H)							
SF 202-D3	DPX5 14-25#	*	8		5.5-13	4500	580×255×535	40/42
SF 202D	DPX5 14-25#	*	8		5.5-13	4500	580×255×535	40/42
SF 202	DPX5 14-25#	*	8		5.5-13	4500	580×255×535	27/32
SF202CX	DPX5 14-25#	*	12		5.5-13	4500	580×255×535	27/32



SF 20U-53D

Direct drive zigzag sewing machine series



SF 1530

Zigzag sewing machine series



SF 20U-33

Zigzag sewing machine series



SF 20U-53

Zigzag sewing machine series

			L	M	H	mm	S.p.m	mm	kg
SF 1530	DPX5 11-14#	2-5 (Available selection)	-	*	*	5.5-13	1400	580x250x530	27/33

						mm						
SF 20U-23	Medium thick material	1910-05	5	6	6	*	2000	550x250x385	23.5/21			
SF 20U-33	Medium thick material	1910-05	5	6	8	*	2000	550x250x385	23.5/21			
SF 20U-43	Medium thick material	1910-05	5	6	12	*	2000	550x250x385	23.5/21			
SF 20U-53D	Medium thick material	1910-05	5	6	9	*	2500	550x250x385	23.5/21			
SF 20U-53	Medium thick material	1910-05	5	6	9	*	2500	550x250x385	23.5/21			
SF 20U-63	Medium thick material	1910-05	5	6	12	*	2000	550x250x385	23.5/21			



A3900-3N-8D

Direct drive three-needle chainstitch sewing machine series (with puller)



Puller device



New design puller




Folder device



Mechatronics design, intelligent direct drive system, power saving more than 70%



Single needle chain stitch



Double needles chain stitch (parallel)



Double needles chain stitch (tandem)



Three needles chain stitch

A3900-8D	Puller device	TVX7 9-21#	2	4	2	4	8-10	1/4	*	*	4000	625x255x565	33/41.5
A3900-3N-8D	Puller device	TVX7 9-21#	3	6	3	4	8-10	1/4	*	*	4000	625x255x565	33/41.5
A3900-1D	Single needle chain stitch	TVX7 9-21#	1	2	1	4	8-10	-	*	*	4000	625x255x565	33/41.5
A3900-2D	Double needles chain stitch	TVX7 9-21#	2	4	2	4	8-10	1/4	*	*	4000	625x255x565	33/41.5
A3900-3D	Double needles sewing front and back makes the stitch strong	TVX7 9-21#	2	4	2	4	8-10	-	*	*	4000	625x255x565	33/41.5
A3900-3ND	Three needles chain stitch	TVX7 9-21#	3	6	3	4	8-10	1/4	*	*	4000	625x255x565	33/41.5



SF 8452Z-D3

Computerized high-speed double needle
lockstitch sewing machine



SF 8450D/ 8750D

Direct drive double
needle lockstitch
sewing machine



Super large hook



Automatic corner device makes
corner sewing more simple and
convenient



Japanese hook(option)



SF 845D/ 875D

Direct drive double
needle lockstitch
sewing machine



Auto press foot lift(option)



SF842/872 serial stitch sample



SF845/875 serial stitch sample

				L	M	H			S.p.m			
SF842D/SF8420D/ SF842-D3	Fixed needle bar small hook	DPX5 11-18#	2	*	*	-	5	7-13	3000	670x330x650	40/49	
SF845D/SF8450D/ SF845-D3	Separate needle bar small hook	DPX5 11-18#	2	*	*	-	5	7-13	3000	670x330x650	40/49	
SF872D/SF8720D/ SF872-D3	Fixed needle bar big hook	DPX5 11-22#	2	-	*	*	7	7-13	2500	670x330x650	40/49	
SF875D/SF8750D/ SF875-D3	Big hook separate needle bar	DPX5 11-22#	2	-	*	*	7	7-13	2500	670x330x650	40/49	

OVERLOCK SERIES





F7-4D/EP/B/Q

Intelligent overlock sewing machine(step motor)



F6-4D/EP

Intelligent overlock sewing machine



F6-4D/CX

Computerized four thread overlock machine
with side suction trimmer




F7-4D/EP/B/BK

Intelligent overlock sewing machine
(step motor, back reverse)



The main shaft is driven
by servo motor




Strong power and quick
start sewing, more precise
needle stop position



Adopting step motor drive press
foot lift to save effort and have
a lighter sound.



Thread trimmer is driven by a
two-way cam with fast trimmer
speed and light sound, which
can make smooth trimming
when the press foot is lifted.



Press foot slightly-lift function. When
the fabric leaves the press foot, it can
be sensed and press foot lift up auto-
matically. So, feed dog will not touch
the press foot. The operation sound
will be lighter and spare parts will be
more wear-resistant.



Intelligent induction system,
new led with cold light



F6-4D

Direct drive overlock
sewing machine




Automatic foot lifter device



Automatic trimmer device,
automatic suction device



Intelligent induction system,
new led with cold light

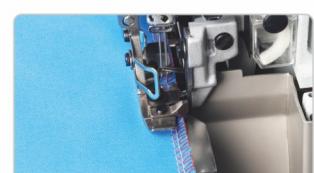

Press foot and thread trimming response
more sensitive. Precise control enable the
thread residue almost disappear.

	3 Thread auto trimmer	4 Thread auto trimmer	5 Thread auto trimmer	4 Thread trimmer	3 Thread trimmer	2 Thread trimmer	1 Thread trimmer	Auto trimmer	3 Thread auto trimmer	4 Thread auto trimmer	5 Thread auto trimmer	4 Thread trimmer	3 Thread trimmer	2 Thread trimmer	1 Thread trimmer	Auto trimmer	mm	mm	mm	kg
F7-3D/EP/B/Q	3 Thread auto trimmer	DCX27 11-14#	1	3	-	5	4.5	0.7-2	5.5	7000	480x335x480	28/35								
F7-4D/EP/B/Q	4 Thread auto trimmer	DCX27 11-14#	2	4	2	6	4.5	0.7-2	5.5	7000	480x335x480	28/35								
F7-5D/EP/B/Q	5 Thread auto trimmer	DCX27 11-14#	2	5	3	8	4.5	0.7-2	5.5	7000	480x335x480	28/35								
F7-4D/EP/B/BK	4 Thread auto trimmer	DCX27 11-14#	2	4	2	6	4.5	0.7-2	5.5	7000	480x335x480	28/33.5								

	3 Thread auto trimmer	4 Thread auto trimmer	5 Thread auto trimmer	4 Thread trimmer	3 Thread trimmer	2 Thread trimmer	1 Thread trimmer	Auto trimmer	mm	mm	mm	kg
F6-3D/EP/B	3 Thread auto trimmer	DCX27 11-14#	1	3	-	5	4.5	0.7-2	5.5	7000	480x335x480	28/35
F6-4D/EP/B	4 Thread auto trimmer	DCX27 11-14#	2	4	2	6	4.5	0.7-2	5.5	7000	480x335x480	28/35
F6-5D/EP/B	5 Thread auto trimmer	DCX27 11-14#	2	5	3	8	4.5	0.7-2	5.5	7000	480x335x480	28/35
F6-4D/CX	4 Thread trimmer	DCX27 11-14#	2	4	2	6	4.5	0.7-2	5.5	7000	480x335x480	28/35
F6-4D	4 Thread trimmer	DCX27 11-14#	2	4	2	6	4.5	0.7-2	5.5	7000	480x335x480	28/35


F3-4D/EP

Intelligent overlock sewing machine


F3-4D

Direct drive high speed overlock
sewing machine

F7T-4D/EP/B

Super high speed overlock sewing machine
with auto trimmer(variable top feed)

SF 799EXT-4D

Direct drive cylinder bed overlock sewing machine
(variable top feed, option with tension device)

SF 958-4D/EP

Super high speed computerized
overlock machine with auto trimmer

SF 958-4D

Super high speed direct
drive overlock machine

SF 747E

Super high speed direct
drive overlock machine

SF 747F-514M2-24/TY

Super high speed direct
drive overlock machine



Three sensors



Automatic foot lifter device



Automatic suction device



stitch

F3-3D/EP	3Thread auto trimmer	DCX27 11-14#	1	3	-	5	4.5	0.7-2	5.5	5500	480x335x480	28/33.5			
F3-4D/EP	4Thread auto trimmer	DCX27 11-14#	2	4	2	6	4.5	0.7-2	5.5	5500	480x335x480	28/33.5			
F3-5D/EP	5Thread auto trimmer	DCX27 11-14#	2	5	3	8	4.5	0.7-2	5.5	5500	480x335x480	28/33.5			
F3-3YD	Non-woven material	DCX27 11-14#	1	3	-	5	7	0.7-2	6	5500	480x335x480	26/30.5			
SF 958-4D/EP	4 Thread auto trimmer	DCX27 11-14#	2	4	2	6	4.5	0.7-2	5.5	5500	480x335x480	26/30			
SF 958-4D	Direct drive 4 thread	DCX27 11-14#	2	4	2	6	4.5	0.7-2	5.5	5500	480x335x480	26/30			
SF 747F-514M2-24/TY	Direct drive 4 thread	DCX27 11-14#	2	4	2	6	4.5	0.7-2	5.5	5000	480x335x480	26/30			
SF 747E	Direct drive 4 thread	DCX27 11-14#	2	4	2	6	4.5	0.7-2	5.5	5500	480x335x480	26/30			

SF 798EXT-3D	Direct drive 3 thread	DCX27 9#-14#	2	4	2	6	4.5	0.7-2	5.5	6000	470x365x500	28/33.5			
SF 798EXT-4D	Direct drive 4 thread	DCX27 11#-16#	2	4	2	6	4.5	0.7-2	5.5	5500	470x365x500	28/33.5			
SF 798EXT-5D	Direct drive 5 thread	DCX27 11#-16#	2	5	3	5	4.5	0.7-2	6	5500	470x365x500	28/33.5			
SF 798EXT-4D/EP	4 Thread auto trimmer	DPX5 14#-18#	2	4	2	6	4.5	0.7-2	5.5	5500	470x365x500	28/33.5			
SF 798EXT-5D/EP	5 Thread thick material	DCX27 11#-16#	2	5	5	6	4.5	0.7-2	6	5500	470x365x500	28/33.5			
SF 799EXT-4D/EP	4 Thread auto trimmer	DPX5 14#-18#	2	4	2	6	4.5	0.7-2	5.5	5500	470x365x500	28/33.5			
F7T-4D/EP/B	Direct drive 4 thread	DCX27 11#-16#	2	4	2	6	4.5	0.7-2	5.5	5500	470x365x500	28/33.5			



Up feed dog



Variable top feed mechanism



Front stitch



Back stitch



INTERLOCK series



H7-01CB/UT/WP

Intelligent flat bed interlock sewing machine(step motor)



H7-01CB/D


Direct drive flat bed interlock
sewing machine




Optional with top and bottom
trimming device(ST)



Hidden outer thread cam



Step motor driving auto trimmer
and foot lifter, stable and efficiency



Front stitch

H7-01CB/UT/WP	Upper wiper without satin stitch	UY128GAS 9-14#	3 2	5 4	4.8,5.6,6.4 2.4,3.2,4,0,4.8,5.6	*	*	4.4	0.5-1.3	5	5500	670x465x660	55/58		
H7-01CB/UT/ST	With satin stitch trimmer	UY128GAS 9-14#	3 2	5 4	4.8,5.6,6.4 2.4,3.2,4,0,4.8,5.6	*	*	4.4	0.5-1.3	5	5500	670x465x660	55/58		
H7-01CB/UT/WP/B (step motor)	Upper wiper without satin stitch	UY128GAS 9-14#	3 2	5 4	4.8,5.6,6.4 2.4,3.2,4,0,4.8,5.6	*	*	4.4	0.5-1.3	5	5500	670x465x660	55/58		
H7-01CB/UT/ST/B (step motor)	With satin stitch trimmer	UY128GAS 9-14#	3 2	5 4	4.8,5.6,6.4 2.4,3.2,4,0,4.8,5.6	*	*	4.4	0.5-1.3	5	5500	670x465x660	55/58		
H7-01CB/D	Standard stitch	UY128GAS 9-14#	3 2	5 4	4.8,5.6,6.4 2.4,3.2,4,0,4.8,5.6	*	*	4.4	0.5-1.3	5	5500	670x465x660	55/58		



H8-01CB/UT/WP

Intelligent cylinder bed interlock machine



H8-01CB/D

Direct drive cylinder bed interlock machine



Optional with top and bottom
trimming device(ST)



Step motor driving auto trimmer
and foot lifter, stable and efficiency



Puller(Optional)



Front stitch




H7-05CB/D/B

Direct drive interlock sewing machine (elastic belt attach
and edge cutter, step motor control feed system)



SF 582-05CB/D

Direct drive interlock machine for elastic
or lace attaching



Step motor control belt feed system



Top belt feed guidance design



Auxiliary feeding chute



Upgraded key screen, easy operation



H8-01CB/UT/WP	Upper wiper without satin stitch	UY128GAS 9-14#	3 2	5 4	4.8,5,6,6.4 2.4,3,2,4,0,4,8,5,6	*	*	4.4	0.5-1.3	5 6.3	5500	670x465x660	55/58			
H8-01CB/UT/ST	With satin stitch trimmer	UY128GAS 9-14#	3 2	5 4	4.8,5,6,6.4 2.4,3,2,4,0,4,8,5,6	*	*	4.4	0.5-1.3	5 6.3	5500	670x465x660	55/58			
H8-02BB/D	Cover seaming	UY128GAS 9-14#	3 2	5 4	4.8,5,6,6.4 2.4,3,2,4,0,4,8,5,6	-	*	4.4	0.5-1.3	5 6.3	5500	670x465x660	55/58			
H8-01CB/D	Standard stitch	UY128GAS 9-14#	3 2	5 4	4.8,5,6,6.4 2.4,3,2,4,0,4,8,5,6	-	*	4.4	0.5-1.3	5 6.3	5500	670x465x660	55/58			



H7-05CB/D/B	Step motor belt feed	UY128GAS 9-14#	3 2	5 4	5.6/6.4	*		4.4	0.5-1.3	6.3	4500	670x465x660	41/50			
SF 582-05CB/D	Normal belt feed	UY128GAS 9-14#	3 2	5 4	5.6/6.4	*		4.4	0.5-1.3	6.3	4500	670x465x660	41/50			


SF 582-01CB/UT/WP

Computerized flat-bed interlock machine


SF 662-01CB/UT/WP


Computerized cylinder bed interlock
sewing machine

SF 582-01CB/D
Direct drive flat-bed
interlock machine


Automatic foot lifter device



Automatic trimmer device



SF 662-01CB/D
Direct drive cylinder-bed
interlock machine


Front stitch



Back stitch

SF 582-01CB/UT/WP	Upper wiper without satin stitch	UY128GAS	9-14#	3 2	5 4	4.8,5,6,6.4 2.4,3,2,4,0,4.8,5.6	*	*	4.4	0.5-1.3	5 6.3	5500	670x465x660	55/58		
SF 582-01CB/UT/ST	With satin stitch trimmer	UY128GAS	9-14#	3 2	5 4	4.8,5,6,6.4 2.4,3,2,4,0,4.8,5.6	*	*	4.4	0.5-1.3	5 6.3	5500	670x465x660	55/58		
SF 582-01CB	Flat bed	UY128GAS	9-14#	3 2	5 4	4.8,5,6,6.4 2.4,3,2,4,0,4.8,5.6	-	*	4.4	0.5-1.3	6.3	5500	670x465x660	41/50		
SF 582-01CB/D	Direct drive flat bed	UY128GAS	9-14#	3 2	5 4	4.8,5,6,6.4 2.4,3,2,4,0,4.8,5.6	-	*	4.4	0.5-1.3	6.3	5500	670x465x660	55/58		
SF 662-01CB/UT/WP	Upper wiper without satin stitch	UY128GAS	9-14#	3 2	5 4	4.8,5,6,6.4 2.4,3,2,4,0,4.8,5.6	*	*	4.4	0.5-1.3	5 6.3	5500	670x465x660	55/58		

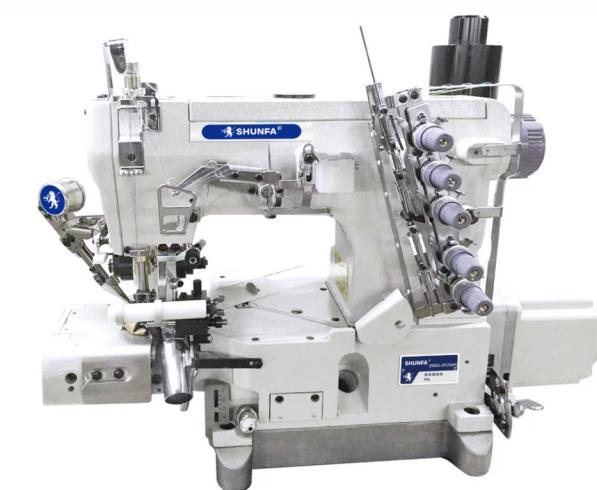
SF600D-33/PUT/RPG

Computerized cylinder bed interlock
machine with right knife

SF 664-35BB/UT

Computerized interlock machine with
auto trimmer with left cutter

SF 562-08C/UT

Direct drive high-speed belt loop
sewing machine (automatic cut belt)



Automatic belt cult cutting device



Left cutter



582-05 Front stitch sample



562-08C Front stitch sample

SF 600D-33/PUT/RPG	Right cut device	UY128GAS	9-14#	3 2	5 4	5.6/6.4	*	*	4.4	0.5-1.3	6.3	4500	670x465x660	55/58		
SF 664-35BB/UT	Left cut device	UY128GAS	9-14#	3 2	5 4	5.6/6.4	*	*	4.4	0.5-1.3	6.3	4500	670x465x660	55/58		
SF 562-08C/UT	For belt loop (automatic cut belt)	UY128GAS	9-14#	2	3	5.6/6.4	-	*	4.4	0.5-1.3	6.3	4500	670x465x660	55/58		
SF 562-08C	For belt loop	UY128GAS	9-14#	2	3	5.6/6.4	-	*	4.4	0.5-1.3	6.3	4500	670x465x660	41/50		



SF 1500-156-UF

Feed-up-the-arm interlock sewing machine with auto trimmer



SF 1560-160L

Lengthening type



Upper wiper



Automatic foot lifter device



Front stitch




Back stitch

SF 1500-156-UF	UY128GAS 9-14#	2(3)	4(5)	5.6	1.2-4	0.8-2	6.3	4000	430×284×360	42/47			
SF 1500-148-UF	UY128GAS 9-14#	2(3)	4(5)	4.8	1.2-4	0.8-2	6.3	4000	430×284×360	42/47			
SF 1500-140-UF	UY128GAS 9-14#	2(3)	4(5)	4.0	1.2-4	0.8-2	6.3	4000	430×284×360	42/47			
SF 1500-164-UF	UY128GAS 9-14#	2(3)	4(5)	6.4	1.2-4	0.8-2	6.3	4000	430×284×360	42/47			




SF 008-12064P

Multi-needle machine

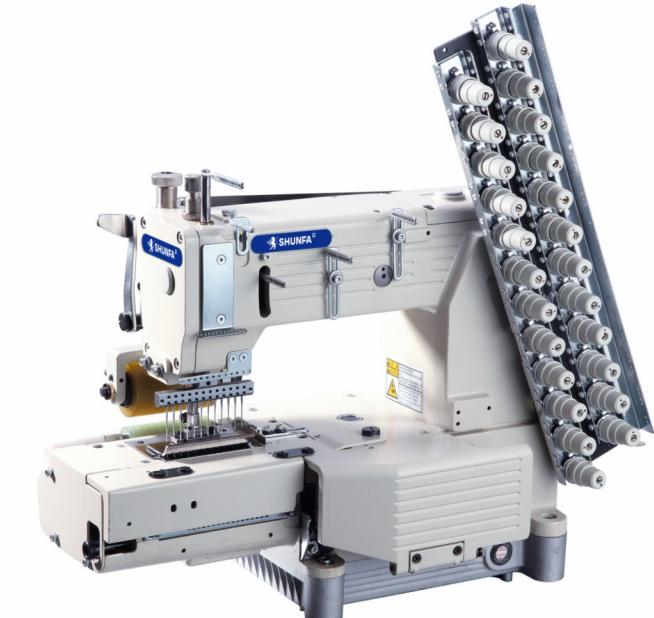

SF 4412D/UT

Multi-needle machine

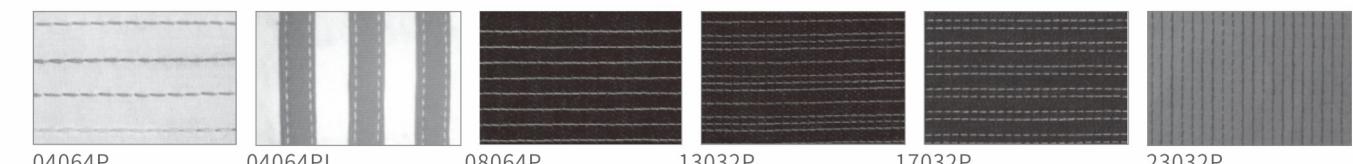

SF 008-12064P/SF4412-64P	UO×11311-14#	12	24	1/4"	12	3000							
SF 008-12048P/SF4412-48P	UO×11311-14#	12	24	3/6"	12	3000							
SF 008-12032P/SF4412-32P	UO×11311-14#	12	24	1/8"	12	3000							
SF 008-13032P	UO×11311-14#	13	26	1/8"	12	3000							
SF 008-16048P	UO×11311-14#	16	32	3/16"	12	3000							
SF 008-17032P	UO×11311-14#	17	34	1/8"	12	3000							
SF 008-23032P	UO×11311-14#	23	46	1/8"	12	3000							
SF 008-04095P	UO×11311-14#	4	8	3/8"	12	3000							
SF 008-04085P	UO×11311-14#	4	8	1"	12	3000							
SF 008-04064P	UO×11311-14#	4	8	1/4"	12	3000							
SF 008-04032P	UO×11311-14#	4	8	1/4-1/8-1/4"	12	3000							
SF 008-06064P	UO×11311-14#	6	12	1/4"	12	3000							
SF 008-08064P	UO×11311-14#	8	16	1/4"	12	3000							
SF 008-08048P	UO×11311-14#	8	16	3/16"	12	3000							
SF 008-06064PL	UO×11311-14#	6	12	1/4"	12	3000							




SF 6200-D(-7)

Direct-drive feed-off-the-arm 4 needle 6 thread
flat-seamer series(auto trimmer)

1. This system ensures smooth feeding of various fabric: from single jersey to fleece, stretchable and uneven thickness portion. Besides, overlapping amount of upper/lower fabric is easily adjustable.
2. Small Cylinder-bed circumference at the needle dropping point is 14mm. The small cylinder-bed enables small tubular operations. Also, long cylinder of 200mm before needle dropping point provides a wide operation space.
3. Unique design for tangle free and smooth supply of threads.
4. Easily adjustable for differential ratio by outer lever.
5. Thread tension can be adjusted individually for neat stitch formation.


SF 6200-01MR-5.2/6.0-D(-7)	Knitting	GB×118 11#	6	5.2/6.0	1.6/2.5	30	★	6	4000	23/31	590×390×490	
SF 6200-01MS-5.2/6.0-D(-7)	Knitting	GB×118 11#	6	5.2/6.0	1.6/2.5	30	★	6	4000	23/31	590×390×490	
SF 6200-02MR-5.2/6.0-D(-7)	Sportswear	GB×118 11#	6	5.2/6.0	1.6/2.5	30	★	6	4000	23/31	590×390×490	
SF 6200-02MS-5.2/6.0-D(-7)	Sportswear	GB×118 11#	6	5.2/6.0	1.6/2.5	30	★	6	4000	23/31	590×390×490	
SF 6200-03MR-5.2/6.0-D(-7)	Sock	GB×118 11#	6	5.2/6.0	1.6/2.5	30	★	6	4000	23/31	590×390×490	
SF 6200-03MS-5.2/6.0-D(-7)	Sock	GB×118 11#	6	5.2/6.0	1.6/2.5	30	★	6	4000	23/31	590×390×490	
SF 6200-04MR-5.2/6.0-D(-7)	Thermal underwear	GB×118 11#	6	5.2/6.0	1.6/2.5	30	★	6	4000	23/31	590×390×490	
SF 6200-04MS-5.2/6.0-D(-7)	Thermal underwear	GB×118 11#	6	5.2/6.0	1.6/2.5	30	★	6	4000	23/31	590×390×490	
SF 6200-05MR-5.2/6.0-D(-7)	Diving suit	GB×118 11#	6	5.2/6.0	1.6/2.5	30	★	6	4000	23/31	590×390×490	

SPECIAL MACHINE

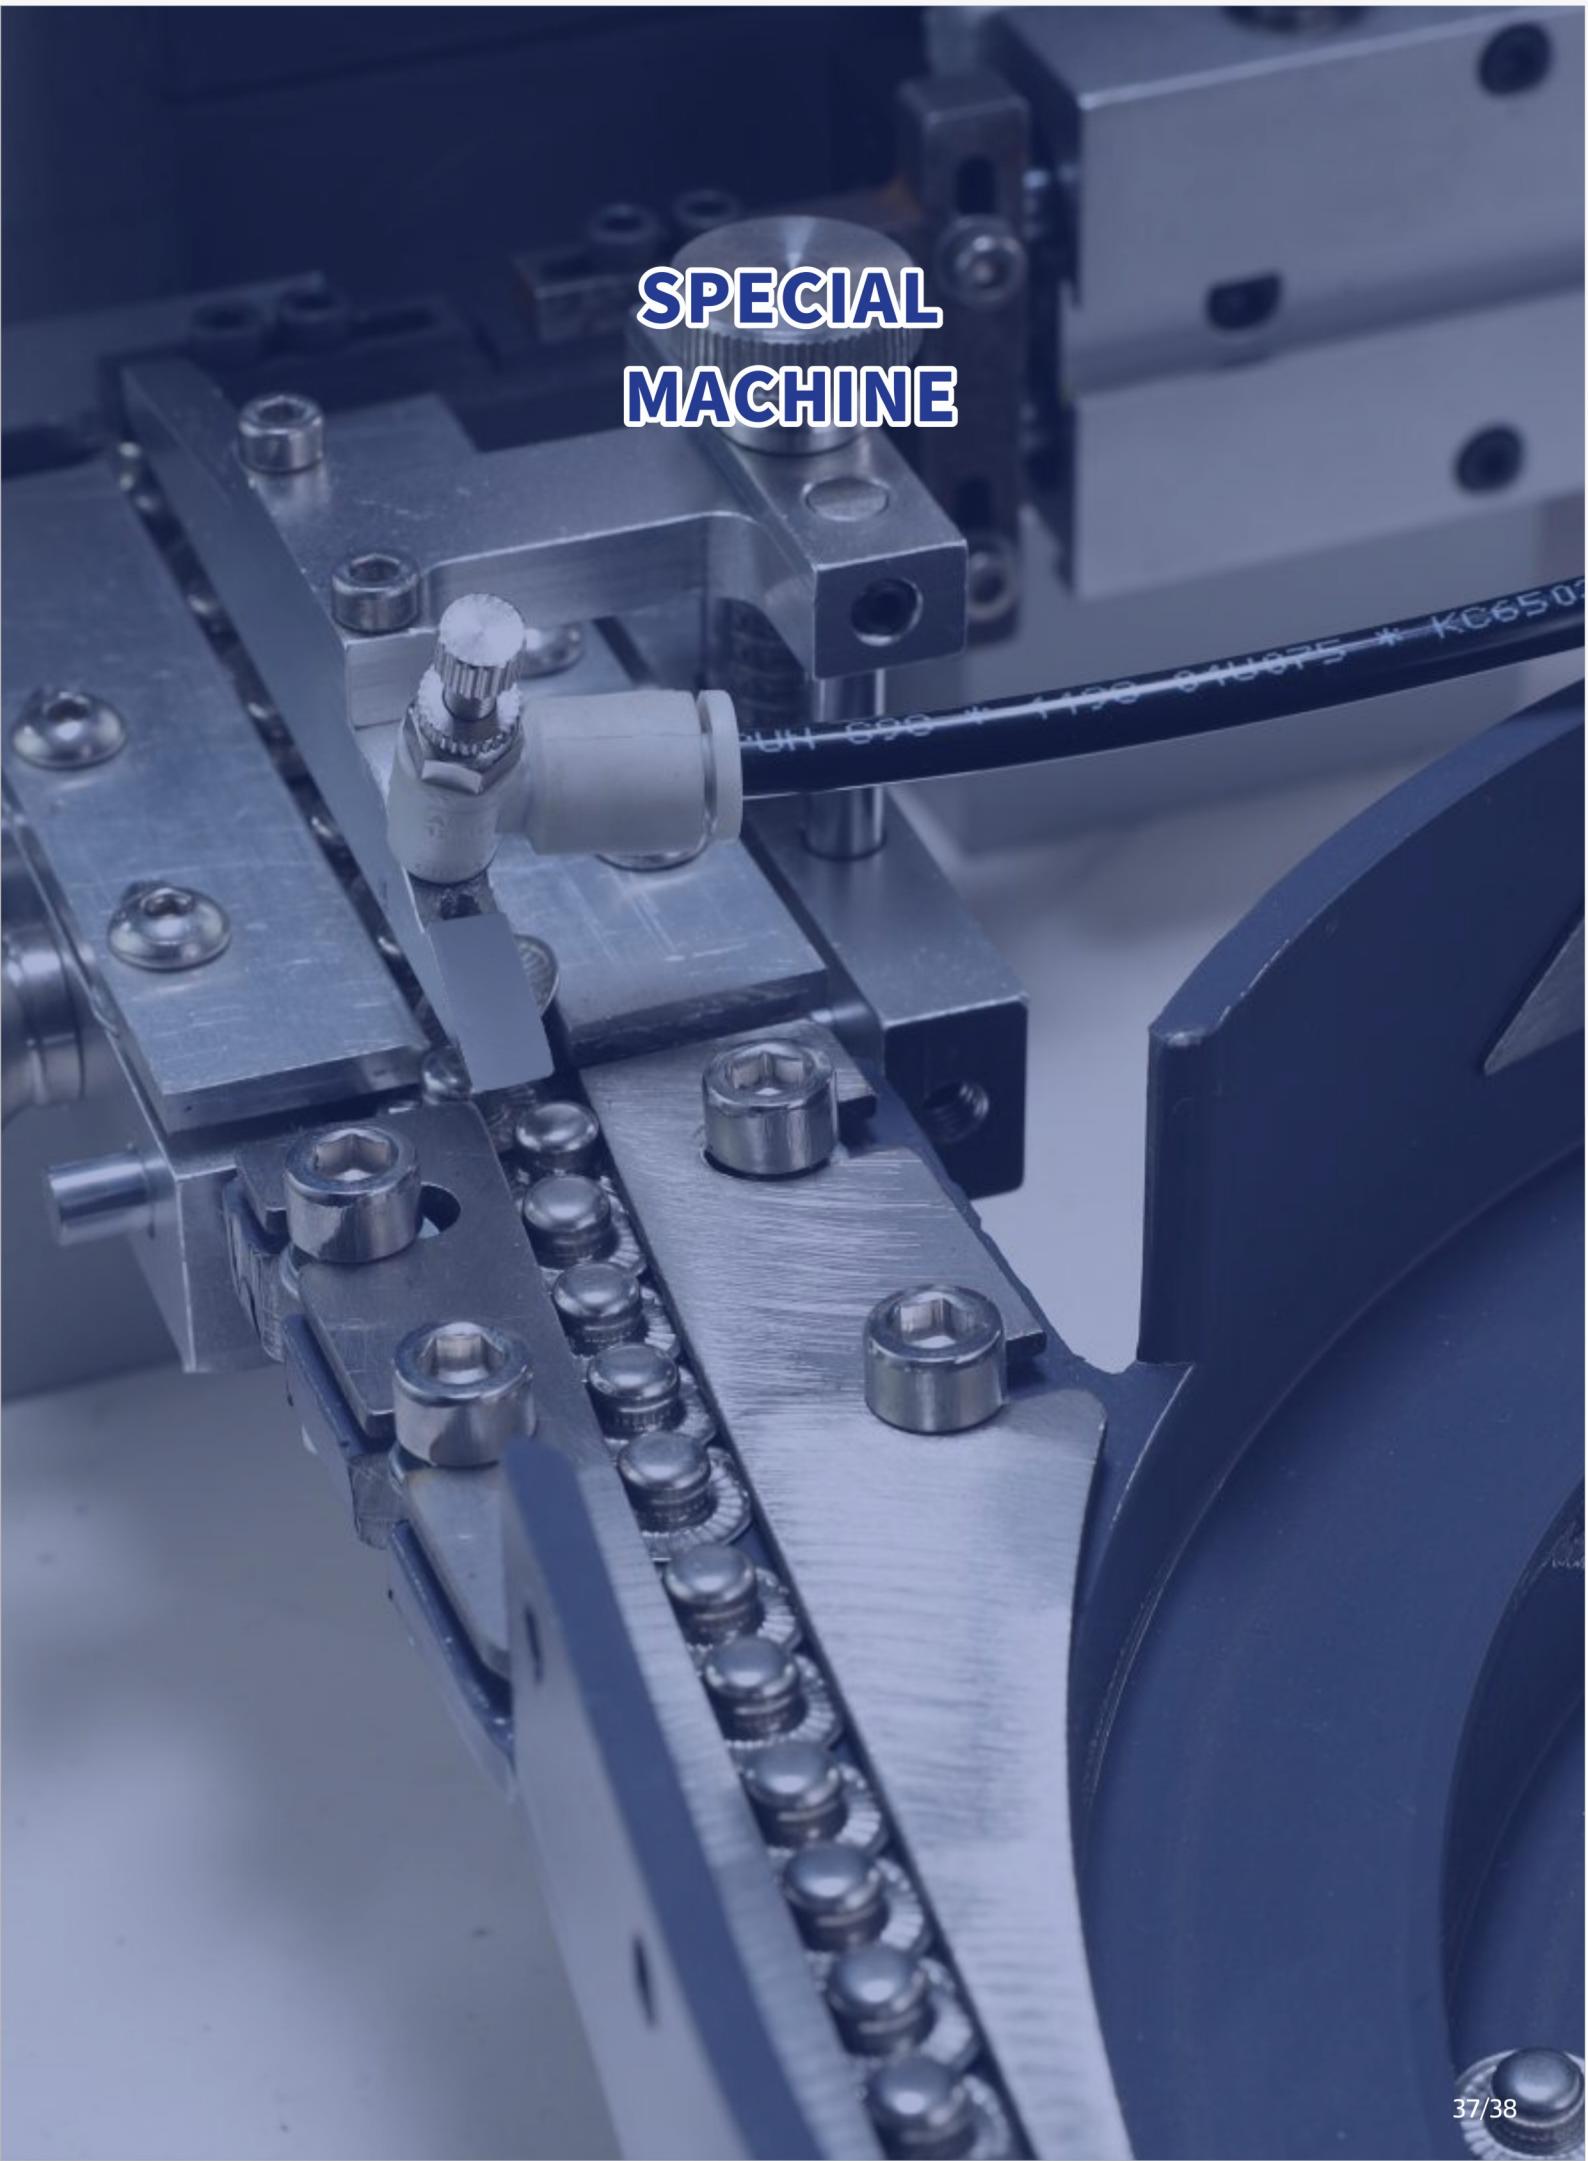

**SF 9813**


Intelligent button machine



Universal mold



Stepper motor driven swing arm



Punching and attaching consistently



Infrared precision positining



Automatic gasketing (optional)



LED design switch



Outside air valve



Single pedal control system

Main points

- Elecitronic (pre-punch&attaching two in one)
- Efficient, powerful, stable and easy to operate

Model	Voltage	Power	Pressure	Driving mode	Net weight	Gross weight	Volume
SF9813	220V	950W	0.4-0.5mpa	Electric	140KG	170KG	123cm*85*cm*55cm
SF9815	220V	950W	0.4-0.5mpa	Electric	140KG	180KG	147cm*93*cm*62cm
SF9816	220V	950W	0.4-0.5mpa	Electric	150KG	180KG	126cm*90*cm*55cm

**SF 808**

Mechanical snap button machine

**SF 818**

Direct drive snap button machine

**SF 0308E**

Three head servo snap button machine

**SF 2808**

Pneumatic snap button machine

**SF 2808S**

Pneumatic snap button machine (time-lapse function)

Model	Voltage (v)	Eccentricity (mm)	Frequency (Hz)	Power (w)	Stroke (mm)	Size of machine (mm)	Size of shelf (mm)	Weight of machine (kg)	Weight of shelf (kg)	
SF 808	110/220/380	19	50-60	250-370	38	360x330x540	1050x580x110	25	28	
Model	Voltage (v)	Frequency (Hz)	Power (w)	Punching pressure(kg)	Motor speed (R/m)	Stroke (mm)	Size of machine (mm)	Size of shelf (mm)	Weight of machine (kg)	
SF 818	180-240/110	50-60	550	1200	5000	40	455x365x250	1050x580x110	16	27
SF 0308E	180-240/110	50-60	550	1000-5000	45	520x410x245	1050x580x110	33.5	27	
Model	Voltage (v)	Atmospheric pressure (Kg/cm)	Frequency (Hz)	Stroke (mm)	Size of machine (mm)	Size of shelf (mm)	Weight of machine (kg)	Weight of shelf (kg)		
SF 2808	110/220	6-8	50-60	40	480x325x270	720x470x250	14.5	10.5		
SF 2808S	110/220	6-8	50-60	40	480x325x270	1050x580x110	16	27		



SF 430D

Computerized bartacking machine



SF 1900

Computerized bartacking machine



SF 9820

Electronic eyelet button holing machine



SF 438D

Computerized button attach machine



SF 1903

Computerized button attach machine



Suitable for men and women's clothes, jeans, knitted, woman underwear, luggage

			Maximum gauge		Storage quantity	Program quantity	Loop program quantity	
SF 430D	Single needle flat seam	0.05-12.7	5000 needles/one pattern	17	40×30	89 kinds of sewing patterns, up to 512 kinds of patterns	50	30 3200 64
SF 1900	Single needle flat seam	0.1-10	5000 needles/one pattern	17	40×30	100 kinds of sewing patterns, up to 100 kinds of patterns	50	20 3200 64
SF 438D	Single needle flat seam	0.05-12.7	5000 needles/one pattern	17	40×30	89 kinds of sewing patterns, up to 512 kinds of patterns	50	30 3200 64
SF 1903	Single needle flat seam	0.1-10	5000 needles/one pattern	17	40×30	100 kinds of sewing patterns, up to 100 kinds of patterns	50	20 3200 64

Model	SF-9820		-00	-01	-02	
	Upper thread cutting device	Bottom thread cutting device	Single shear	Long line cutting	L2230	L1826*1
Upper thread cutting device			None	Long line cutting	Short thread cutting	
Main use		Working wear, sports wear and jeans				
Function		The cutting device cuts only upper thread. Maximum length of button hole is 50mm.		Cutting device will cut long tail everytime. The longend keeps the tail in safe length in longer distance while sewing, which is more suitable for precise and manual tail cutting.	The cutting device will cut short tail everytime, which saves manual work of cutting and reduces thread consumption.	
Sewing shape						



SF 781EF

High speed direct drive button
holing machine



SF 1790

High speed computerized
button holing machine



SF373D/SF1377D

Direct drive high speed button attaching machine




Clear needle position easy for
Precise sewing



Automatic foot lifter, up to 12mm



Beautiful stitch




Stitch



Step motor drive press foot lift



Japanese hook



SF373D-988A


High speed button attaching machine
with automatic button feed system




Automatic foot lifter, high efficiency



Humanize mechatronic operation



SF 373D Stitch sample



SF 1377/TY Stitch sample

SF 781EF	DPX5 11-14#	1/4"-3/4",6.4-19	22	2.5-4 (3/32"-5/32")	*	6.4,9.5,12.7,19,1/4",3/8",1/2",5/32"	4.4	3000	690×345×860	60/70				
SF 781K Special in knitting	DPX5 11-14#	1/4"-1",6.4-25.4	33	2.5-5 (3/32"-3/16")	*	6.4,9.5,12.7,19,25.4,1/4",3/8",1/2",3/4",1"	4.4	3000	690×345×860	60/70				
SF 783NV Special in sweater	DPX5 11-14#	1-4"-1/4",6.4-31.7	40	2.5-5 (3/32"-3/16")	*	6.4,9.5,12.7,19,1/4",3/8",1/2",5/32,3/4",1",5/4"	4.4	3000	690×345×860	60/70				
SF 1790	DPX5 11-14#	1-4"-1/4",6.4-31.7	41	2.5-5 (3/32"-3/16")	*	6.4,9.5,12.7,19,1/4",3/8",1/2",5/32,3/4",1",5/4"	5.5	3600	760×380×550	65/75				

SF 373D	TQ×1 14-18#	1	2	φ10-28	X:2.5-6.5;Y:0-6.5	*	*	9	1400	555×330×420	22/26			
SF 1377/TY	TQ×1 14-18#	1	2	φ10-28	X:2.5-6.5;Y:0-6.5	*	*	14	1500	507×440×440	24/29			
SF 373D-988A	TQ×1 14-18#	1	2	φ10-28	X:2.5-6.5;Y:0-6.5	*	*	9	1400	1230×775×1350	150/175			



SF 927

Two needles feed off the arm machine(thin)



SF 928

Three needles feed off the arm machine(heavy)



Front



Back



Front



Back



SF 2284

High-speed zigzag machine
(1 step 2 point, 3 step 4 point function)



SF 2284D-7

Direct drive high-speed zigzag machine
(1 step 2 point, 3 step 4 point function)


This machine adopts a new type of rotating thread take-up lever, which can obtain high-quality and stable stitches. The shuttle shaft is used to cooperate with the compensation mechanism, and the left and right positions of the rotary hook when hooking the thread are uniform. etc., can prevent jumper and disconnection. Equipped with a slight lifting pressure for elastic fabrics. The foot device will make the presser foot float slightly, and then sew, the stitches are neat and beautiful. The specially designed wire winder is quicker and more convenient to use, and the L2284-D series can be realized by a single machine. Pattern sewing of straight stitch, 2-point zigzag stitch, 4-point zigzag stitch, direct drive type with automatic thread trimming function, Greatly improve the production and use efficiency of the machine.

Function Characteristic:

- The special structure of cantilever tubular is especially suitable for sleeves, trousers and -strch - kind of caliber things joint-sewing.
- both needle thread tension and bobbin thread tension have been decreased after reinvestigation of the chain stitching mechanism. Furthermore, the stitch dial gauges and looper have been dramatically improved, thereby forming beautifully finished seams and preventing puckering.

Usage:

It is suitable for Men's Suit, Suit-Dress, Shirts, Work Suits, Casual pants, Jeans, Tent, Raincoats, Filter bag etc.

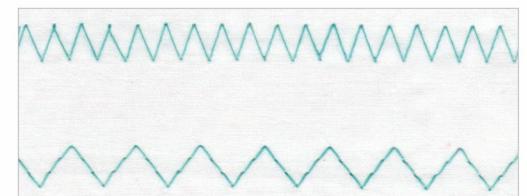

Front

Reverse side

SF 927	TVX64 11#-14#	2	1/8 3/16 1/14 3.18 4.76 6.35	1.2-4.2mm	11	4	2850	600x570x470	65/60
SF 928	TVX5 16#-21#	3	1/4 9/16 5/16 3/18 6.4 7.14 7.94 9.52	1.2-5.2mm	11	6	4000	605x550x500	65/60

SF 2284	DPX5 10#-14#	8		5.5-10		5000	39/47	660×350×620	mm
SF 2284D-7	DPX5 10#-14#	8		5.5-10		5000	39/47	660×350×620	mm



SF 1310/2210/3020

Computerized programmable pattern sewing machine



Sewing data is sewn faithfully and attractively.



Different parameter can be adjusted easily from the operation panel



Easy-to-use programmer (optional product)



SF 1390

Intelligent template machine series



Belt module drive



Laser cutting device (optional)

Suitable sewing range:
X axis: 1300mm
Y axis: 900mm
Floor area: 2170mm × 2130mm

Technical Parameters:

Needle spacing: 0.5mm to 12mm

Number of memory programs: up to 999

Needle: DP×5 #(7/9/11/16/22); DP×17 #(12/23); DB×1 #(6-16)

Sewing machine motor: 750W direct drive servo motor

Sewing speed: 200rpm~3000rpm (when the stitch length is 2.5mm, ordinary wire material)

Power specifications: 220V 2250W

Recognizable template files: 999

Air specification: 0.4-0.6MPa

Program input device: Computer USB data cable or USB flash drive.

Option Device:



Flip Flop for Label




Sliding Presser for Label



Patch Pocket



Custom-made



Custom-made



SF 1201
(300×350)

SPECIFICATION:

- * Suitable for flat ,cap and finished garments embroidery
- * Max working speed 1200RPM
- * Memory stitches: 20.000.000 or 200pcs patterns, single pattern stitches at most 1.000.000
- * 10inch touch panel, with photo embroidery function
- * Auto color changing, auto thread trimming
- * 16 languages:Chinese,English,Turkish,Spanish,Portuguese,Russian,French,Arabic,Dutch,German,Vietnamese,Thai,Romanian,Italian,Polish,Hebrew
- * Device could be matched(cording,sequins,beads)
- * Plywood packing



SF 1202HC
(400×500)

SPECIFICATION:

- * Suitable for flat ,cap and finished garments embroidery
- * Max working speed 1200RPM
- * Memory stitches: 20.000.000 or 200pcs patterns, single pattern stitches at most 1.000.000
- * 10inch touch panel, with photo embroidery function
- * 80V-260V adapted to all electricity environment
- * Auto color changing, auto thread trimming
- * 16 languages:Chinese,English,Turkish,Spanish,Portuguese,Russian,French,Arabic,Dutch,German,Vietnamese,Thai,Romanian,Italian,Polish,Hebrew
- * Device could be matched(cording,sequins,beads)
- * Plywood packing



SF 1204HC
(400×450)

**Computerized multi embroidery
machine series**

SPECIFICATION:

- * Suitable for flat ,cap and finished garments embroidery
- * Max working speed 1200RPM
- * Memory stitches: 20.000.000 or 200pcs patterns, single pattern stitches at most 1.000.000
- * 10inch touch panel, with photo embroidery function
- * Auto color changing, auto thread trimming
- * 16 languages:Chinese,English,Turkish,Spanish,Portuguese,Russian,French,Arabic,Dutch,German,Vietnamese,Thai,Romanian,Italian,Polish,Hebrew
- * Device could be matched(cording,sequins,beads)
- * Plywood packing



SF 168

Double inner line machine



SF 63922

**Lockstitch hemming on trouser bottoms
and sleeves machine**



SF 1254A

High speed pillow sewing machine



SF 2500

Carpet overedging sewing machine



SF 2971

Shoe patching machine

Model	Motor	Stitch length	Sewing thickness	Sewing needle	Bobbin diameter/thickness	Weight	Overall size	
SF 168	550W/380V/3PH	3-13mm	1.5-6mm	CPX5	26/11mm	150kg	1070x560x1250mm	
Models	Stitch spec.	Max. Speedjs.p.mj	Needle	Motor	Measurement	Gross weight	Net weight	Cubet
SF 63922-D4	Interchange between lockstitch and chainstitch	3500	DVX57 18#	Direct drive servo motor	620x390x430mm	40kg	34kg	0.1116
SF 1254A	DPX17(18#)	★	★	110	2000	800x380x800	65/70	
SF 2500	0-2500 s.p.m	7713 25-26#	1/2/3	1-10	12	12	-	
					L M H		★ ★ ★	
						750W	498x510x410	38/42

Model	Emb.Space	Needle	Head	N.W/G.W	Meas
SF 1201	300x350mm	12 (15 adopted)	1	85/175kg	880x740x990mm
SF 1202HC	400x500mm	12 (15 adopted)	2	350/470kg	1460x1130x1100mm
SF1204HC	400x450mm	12 (15 adopted)	4	800/880kg	2200x1130x1300mm


SF 335

Cylinder bed compound feed
lockstitch sewing machine

SF 810

Post bed one or two needle bottom
feed sewing machine

SF 8365

Post bed one/two needle compound feed
lockstitch sewing machine

SF 8703

Compound feed extra high post bed
lockstitch sewing machine

SF 4420

One or two needle compound
feed lockstitch sewing machine

SF 181

One needle heavy-duty bottom feed
walking foot lockstitch sewing machine

SF 801

Skiving machine


SF 243

Extra heavy duty compound feed
lockstitch sewing machine

SF 9910

Post bed lower roller feed
sewing machine

SF 341

Cylinder bed compound feed
sewing machine

SF 335	DPX17 16-22#	33	φ46	6	*	*	*	6-13	2000				
SF 810	DPX5		15	*	-	*	-	6-13	2000				
SF 4420	DPX5 14-22#	33	9	*	-	*	*	7-10	1800				
SF 181	DPX3 24-27#	56	15	-	-	-	*	13-25	800				

SF 8365	*	1600	*	6	DPX17 16-23#	36	*	8/16	443x255	M/H			
SF 8703	*	1200	*	10	DPX17 20-25#	36	*	8/16	550x255	H			
SF 243	*	800	*	15	DPX3 24-27#	56	*	13/25					
SF 9910	1	2500	8-15	7	Maximum stitch				DPX5 11-22#	38			
SF 341	2000		0-9	15	DPX17								72



SF 2628LG

Single-needle Compound Feed Cylinder
Sewing Machine



SF 246/246V

Cylindrical composite material flat sewing
machine&oval feed&level



SF 441

One or two needle compound
feed lockstitch sewing machine



SF 8B/8B-A

Single-needles standard rotary
hook&reverse feed device



SF 1341-C

Clindrical composite material extremely thick
flat sewing machine(auto-lubricated)

				Maximum stitch		
SF 2628LG	1	2000	10-15	5.5	DPX17	56
SF 246/246V	2000	0-8	15	DPX17	1	50
SF 441	800	0-12	20	DPX3	1	
SF 8B/8B-A	2000	0-6.3	14	DPX17	1	65
SF 1341-C	2000	0-11	14	DPX17	1	72

SF 500H

Fusing machine



SF B38

Manual heat transfer machine



SF 1977A

Thread trimmer machine



SF 700

Belt cutting machine



SF 811

Energy saving motor

Model	Voltage	Motor power	Heater power	Adhering pressure	Teflon belt speed	Temperature
SF-H200	220-380	350	3	0-3	0-10	0-220
SF-H400	220-380	350	4	0-3	0-10	0-220
SF-H500	220-380	400	5.5	0-3	0-10	0-220
SF-H600	220-380	400-600	6	0-3	0-10	0-220

Model	Working area(cm)	Voltage(v)	Power(kw)	Temperature(°C)	Delaying time(s)	Packing size(cm)	Weight(lgkg)
SF-B38	38×38	220	2.5	0-250	1-99	77×51×54	44
SF-B60	40×60	220	3.2	0-250	1-99	77×68×54	65

Model	Rating voltage(v)	Rating frequency(Hz)	Cutting height(mm)	Net weight(kg)	Packing size(mm)	Inch
SF-1977A	220	50/60	600/700/750	16	960x360x260	22

Model	Effective width right tool	Cutting height	Bonding pressure	Cutting motor power	Blower motor power	Linear velocity of tool	Tool specification	V belt specification	Worktable specification	Power supply	G.W.	Out line dimension	Packing size
SF 700	700mm	180mm	12Kpa	750W	250W	11;12.2; 13.3m/min	0.45X10X3500	A-1092mm	1200X1400	220/1PH 380V/3PH/50HZ	210kg	1920x1200 x1614mm	1530x745 x1750mm



SF DT
Vacuum iron table



SF QST
Vacuum iron table



DLD6-04-B3
Automatic heating steam generator



DLD6-12-04-B2
Automatic heating steam generator



SF 75L
Mini electric iron with boiler



SF-1C
End cutter machine



SF-100L
End cutter machine



SF 600H/SF 300L
Steam iron/gravity feed iron

Model	Heating power	Normal water volume	Full water volume	Rated steam pressure	Rated evaporation rate	Rated steam temperature	Iron	Power supply	G.W.	Out line dimension
DLD6-12-04-B2	12kw	17L	29L	0.4Mpa	17kg/h	151°C	Full steam iron	380V/3PH/50Hz	56kg	480x550x1000mm
DLD6-04-B3	6kw	9L	18L	0.4Mpa	9kg/h	151°C	Electric steam iron	220V/1PH/50Hz 380V/3PH/50Hz	55/70	550x480x1060mm
Model Voltage(v) Boiler wattage(kw) Iron wattage(kw) Steam pressure(bar) Boiler capacity Usage time										
SF-75L	220/110		150		120		3.5		4.5	8hours
Model	Workingarea(cm)	Voltage(v)	Motor	Model	Voltage(v)	Watts	Hertz			
SF-DT	150x80	220/380	0.55KW	SF-1C	220	180W	50Hz	14000		
Model	Workingarea(cm)	Voltage(v)	Motor	Model	Voltage(v)	Input(w)	Blade size	Cut thickness		
SF-QST	130X42	220/380	0.55KW	SF-100L	AC220±20%	3.6-200	100mm	27mm	600/800/1000/ 1200/1400	
					AC110±20%					



SF 26-1A/GK9-310
Bag closer machine



SF 3
Auto-sharpening cutting machine series



SF 125
Round cutter machine



SF 801A/802A
Cloth tape cutting machine series



SF 600/SF500
Blind stitch machine

SF 26-1A	DNX1 25#	1	6.5	*	220/50	1250	400×270×380	5/6.6							
SF 103	6",8",10",12",13	500-750W	90,110,160,201,260	220/110V	12850	50/60	735×410×320	15/17.5							
SF 3	6",8",10",12",13	500-750W	110,160,201,260,285	220/110V	12850	50/60	735×410×320	15/18							
SF 801A	18	38	16-50	70×70	3000	830×355×250	20/22								
SF 802A	18	38	16-50	70×70	3000	830×355×240	23/25								
SF 600	Apply to various types of fabrics	LWX6T 11-14#	1	3.2-8.5	7	*	1800	480×385×440	23/28						